


## SYSTEM DATASHEET

### Wall cladding OS - 1x15 GKFI DFH2/KAP


on a hat profile structure with single plasterboard sheathing of DFH2 type GKFI boards, thickness: 15 mm without mineral wool filling

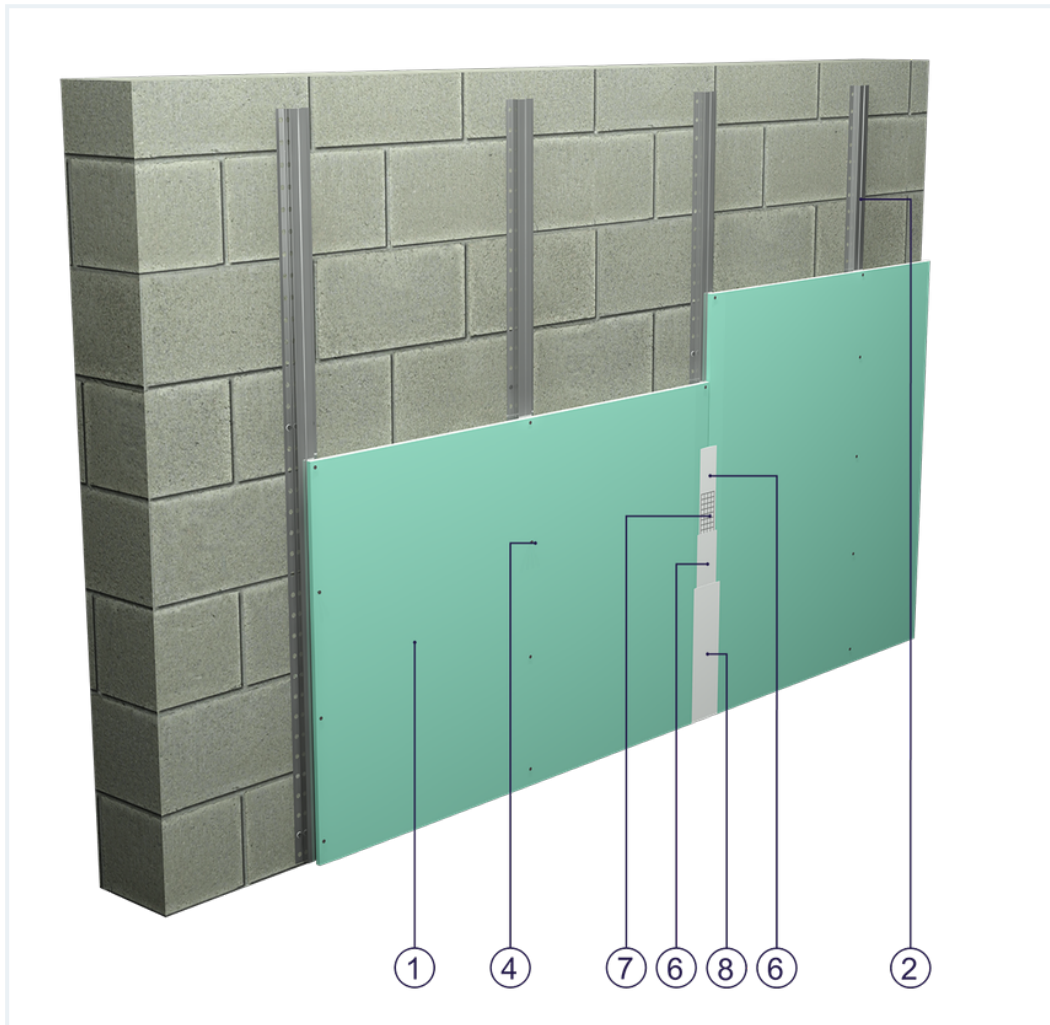

### Wall cladding elements

1. Norgips S GKFI type DFH2 gypsum plasterboard , thickness: 15 mm
2. Norgips top hat profiles, max. axial spacing every 60 cm <sup>1)1)1)1)1)1)1)1)1)1)</sup>
3. Optional Norgips sealing tape, width 75 mm
4. Norgips 3.5 x 25 mm sheet metal screws, max. spacing every 25 cm
5. Steel dowels, min. Ø 6 x 40 mm in two rows every 100 cm
6. Norgips Start & Finish ready-made joint compound or Norgips Start gypsum joint compound
7. Norgips reinforcing tape
8. Ready-made joint compound Norgips Extra Finish, ready-made joint compound Norgips Start & Finish, gypsum joint compound Norgips Finish

## Technical data

	Fire resistance class EI 15
---	--------------------------------

	Max height 12.0 m
---	----------------------

	Wall mass 15 kg/m <sup>2</sup>
---	-----------------------------------

	Cladding mass 15 kg/m <sup>2</sup>
---	---------------------------------------

The above-mentioned parameters apply to a partition made of sheet metal profiles with a thickness of 0.55 and 0.6 mm.

1) If profiles are used in the horizontal orientation, their maximum profile axial spacing must be decreased to 500 mm. Moreover, the material consumption must be corrected using the calculator.

## Standard

### ★ BASIC

Provides a lightweight stable building with basic fire resistance. A robust and cost-effective solution.

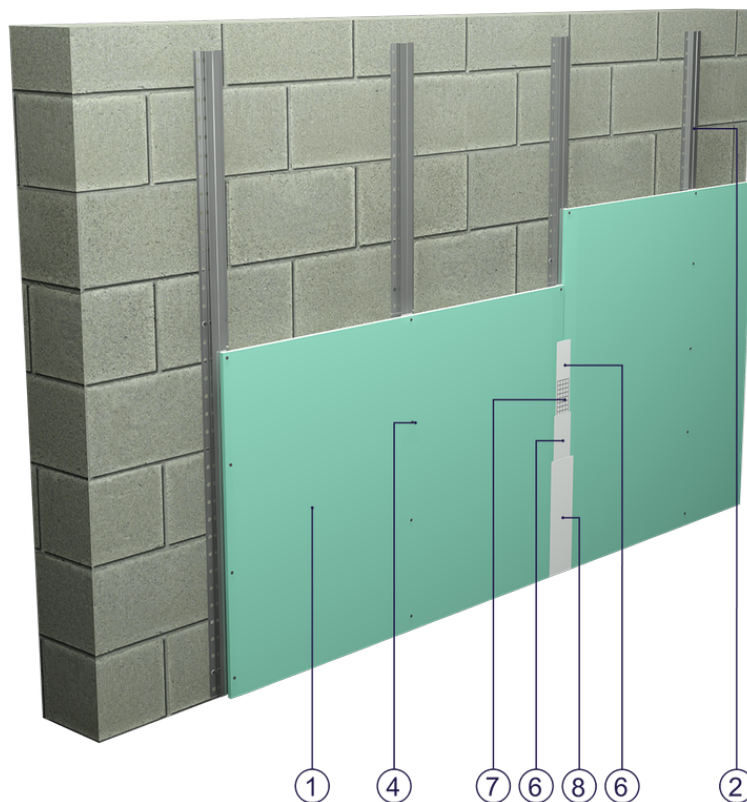


Fig. 1. Wall cladding view

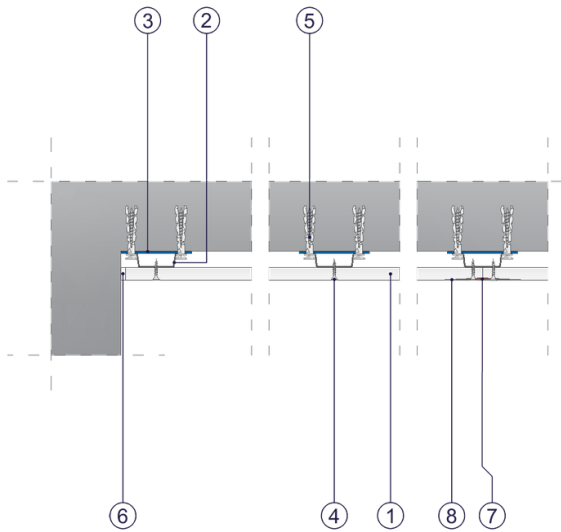


Fig. 2. Wall cladding horizontal section

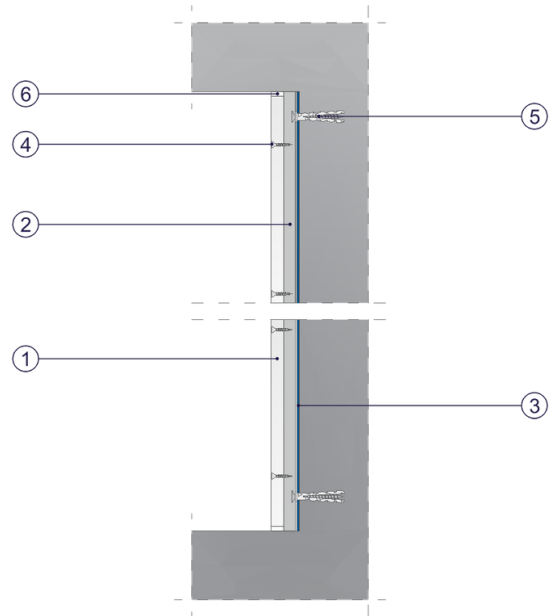


Fig. 3. Wall cladding vertical section