


SYSTEM DATASHEET

Partition wall SD - 2x12,5 GKB A + ACO A/2xCW 100 2xW



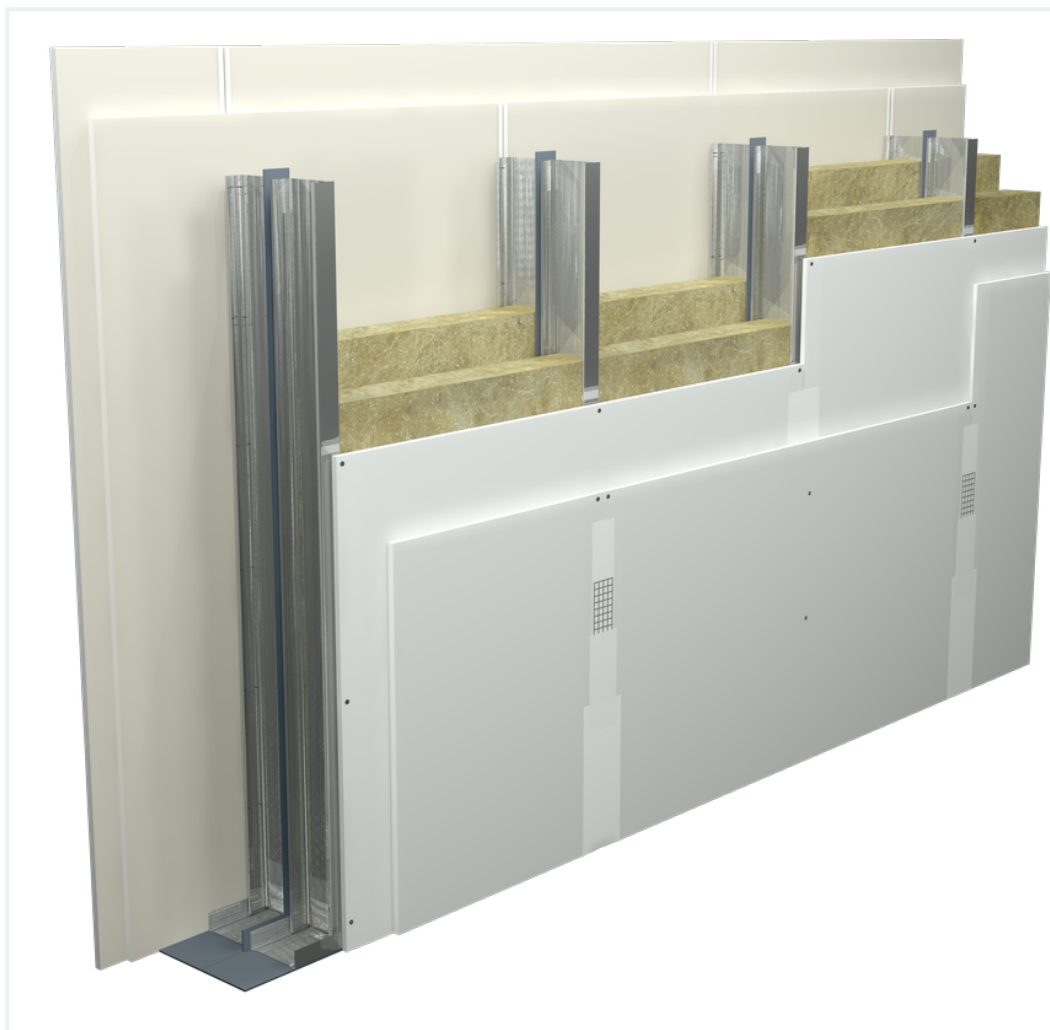

on a double structure made of CW 100 and UW 100 profiles, hybrid with double sheathing with GKB type A boards, thickness: 12.5 mm and Acoustic Type A with a thickness of 12.5 mm with mineral wool filling



Partition wall components

1. Norgips S GKB type A plasterboards of 12.5 mm thickness 12.5 mm
2. Norgips S GKB type A plasterboards of 12.5 mm thickness 12.5 mm
3. Norgips CW 100 profiles, max. axial spacing every 60 cm
4. Norgips UW 100 profiles mounted on horizontal load-bearing elements
5. Norgips sealing tape, width 100 mm
6. Norgips sealing tape, width 50 mm
7. Norgips 3.5 x 25 mm sheet metal screws, max. spacing every 75 cm
8. Norgips 3.5 x 35 mm sheet metal screws, max. spacing every 25 cm
9. Fastening pins, min. \varnothing 6 x 40 mm, max. spacing every 80 cm
10. Openings in studs for installation wires
11. Norgips Start & Finish ready-made joint compound or Norgips Start gypsum joint compound
12. Norgips reinforcing tape
13. Ready-made joint compound Norgips Extra Finish, ready-made joint compound Norgips Start & Finish, gypsum joint compound Norgips Finish
14. Mineral wool

Technical data

 Fire resistance class EI 60 ($h_{\max}=6.5$ m) ^{1) 2)}	 Max height 6.5 m ¹⁾
 Wall mass 37 kg/m ² ³⁾	 Acoustic insulation $R_W=71$ dB ⁴⁾ $R_{A1}=69$ dB ⁴⁾

The above-mentioned parameters apply to a partition made of sheet metal profiles with a thickness of 0.55 mm and 0.6 mm or 0.55 mm

- ¹⁾ The stated heights apply to constructions with a profile spacing of 600 mm. When a structure with profiles spaced every 300 or 400 mm is used, the permissible wall height increases. Contact system provider representatives for details. The stated heights apply to rooms where only a few persons are present simultaneously (e.g. rooms in flats, hotels, hospitals). In rooms where a large number of persons are present simultaneously (e.g. conference rooms, classrooms, lecture halls), the permissible height is 5.7 m.
- ²⁾ Based on classification no. LBO-127-KZ/24 for 50 mm rock wool
- ³⁾ The weight specified does not include the insulation material weight.
- ⁴⁾ Based on report no. A 211002 for 2x100 mm glass wool

Standard

★★ RECOMMENDED

It provides higher building stability, fire resistance and sound insulation. The optimal solution.



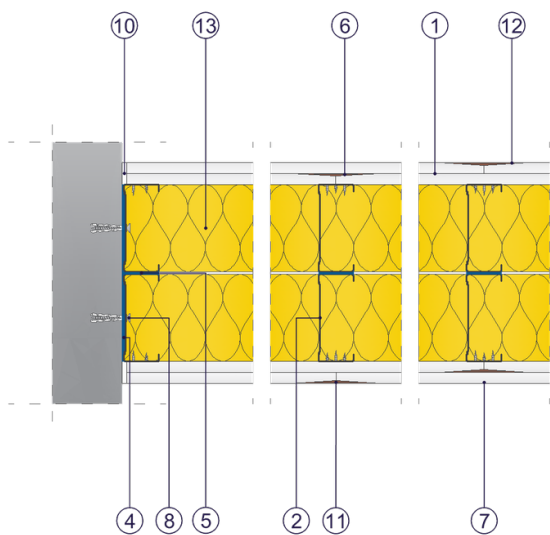
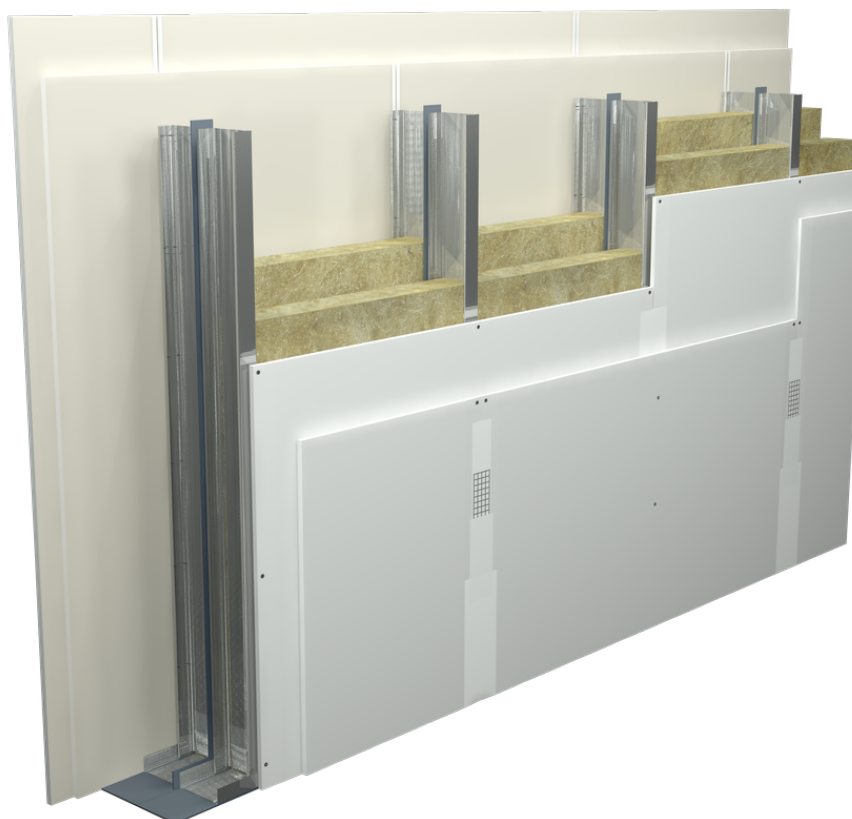


Fig. 2. Partition wall horizontal section

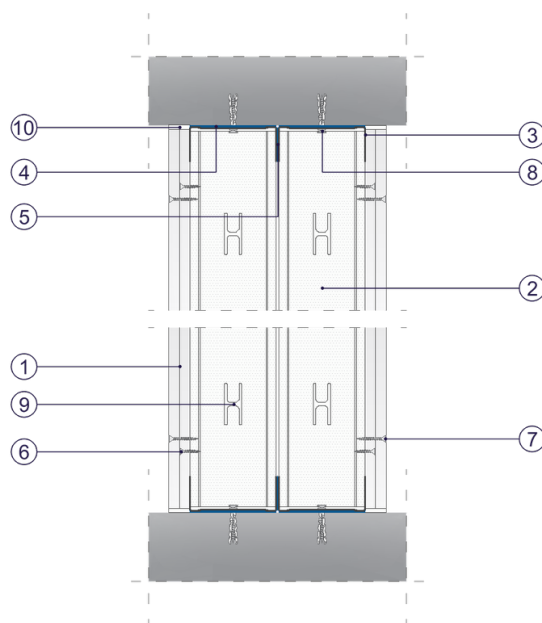


Fig. 3. Partition wall vertical section