


## SYSTEM DATASHEET

### Attic lining ZP - 2x12,5 GKBI H2 + GKFI DFH2/CD 60, L, W

on a structure made of CD 60 profiles and flat hangers, hybrid with double cladding with GKBI type H2 boards, thickness: 12.5 mm and GKFI type DFH2 with a thickness of 12.5 mm

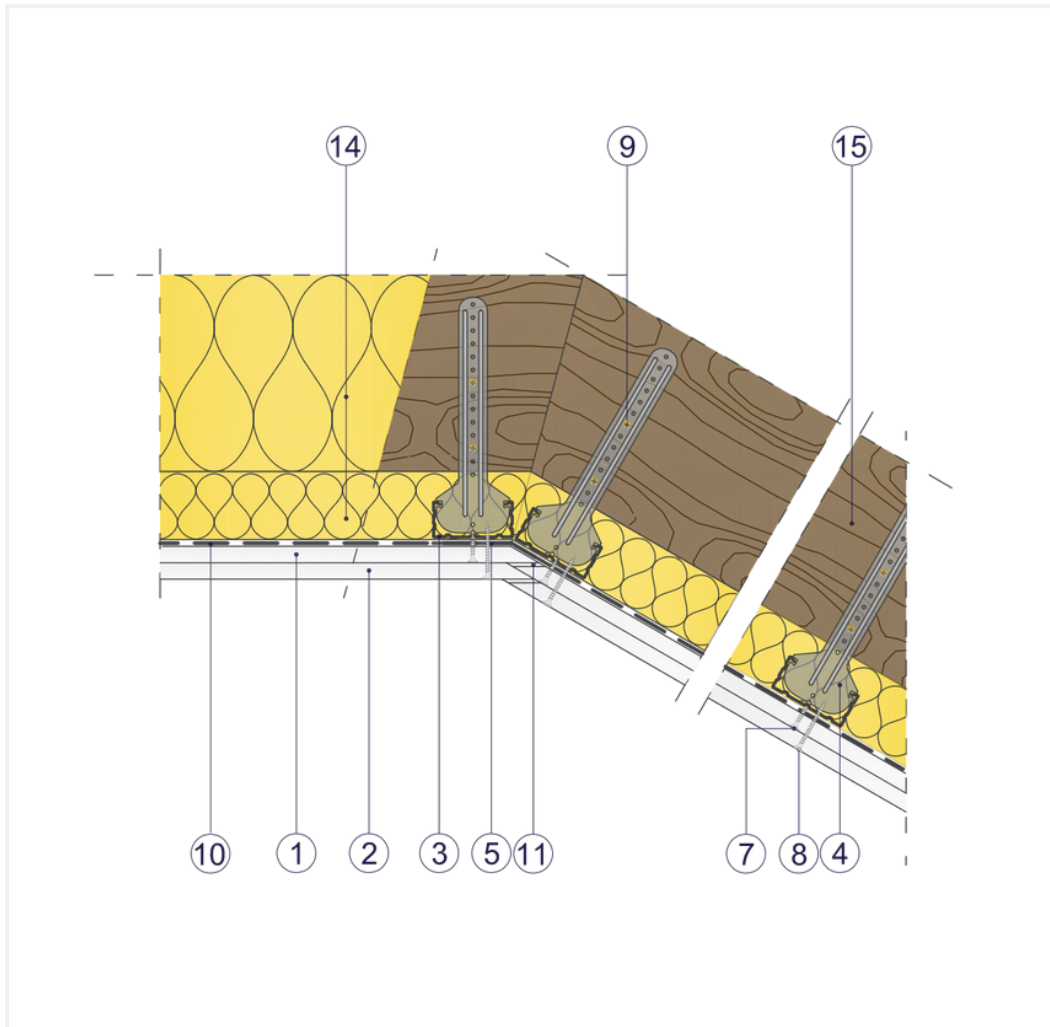

## Attic lining elements

1. Norgips S GKBI type H2 gypsum plasterboard , thickness: 12.5 mm
2. Norgips S GKFI type DFH2 gypsum plasterboard , thickness: 12.5 mm
3. Norgips CD 60 profiles, max. axial spacing every 40 cm\*\*
4. Norgips flat hangers
5. Norgips FLEX universal profile
6. Norgips longitudinal connectors mounted with 4 3.5x9.5 mm sheet metal screws with a self-tapping tip
7. Norgips 3.5 x 25 mm sheet metal screws, max. spacing every 40 cm
8. Norgips 3.5 x 35 mm sheet metal screws, max. spacing every 17 cm
9. Norgips 3.5 x 9.5 mm sheet metal screws with a self-tapping tip
10. Norgips 3.5 x 35 mm wood screws
11. Vapour barrier membrane
12. Norgips Start & Finish ready-made joint compound or Norgips Start gypsum joint compound
13. Norgips reinforcing tape
14. Ready-made joint compound Norgips Extra Finish, ready-made joint compound Norgips Start & Finish, gypsum joint compound Norgips Finish
15. Mineral wool
16. Roof rafters

## Technical data



Fire resistance class  
REI 30 <sup>2)</sup>



Lining weight  
20 kg/m<sup>2</sup> <sup>1)</sup>

The above-mentioned parameters apply to a partition made of sheet metal profiles with a thickness of 0.55 mm and 0.6 mm or 0.55 mm

In the system ZP - 2x12.5 GKFI DFH2/CD 60. L, W the use of sheet metal profiles with a thickness of 0.5 mm is not allowed.

<sup>1)</sup> The weight specified does not include the insulation material weight.

<sup>2)</sup> Based on classification no. LBO-077-KZ/26E

## Standard

★★ RECOMMENDED

It provides higher building stability, fire resistance and sound insulation. The optimal solution.



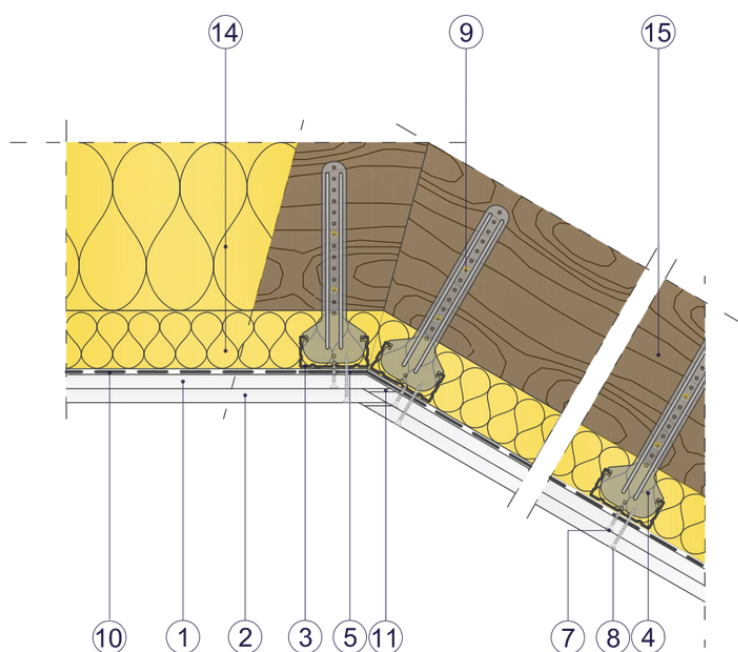


Fig. 2. Attic horizontal section

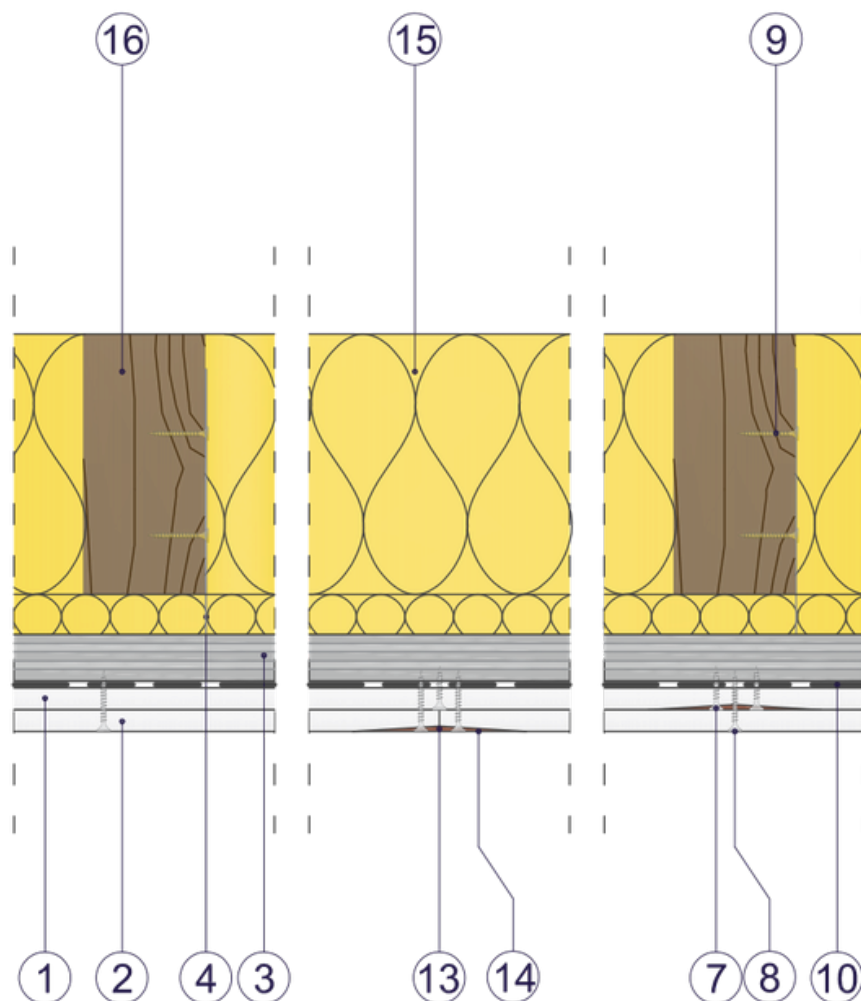


Fig. 3. Attic vertical section