


SYSTEM DATASHEET

Attic lining ZP - 1x12,5 GKBI H2/KAP 0,50, W

on top hat profile structure 0.5 mm with single sheathing of GKBI type H2 with a thickness of 12.5 mm

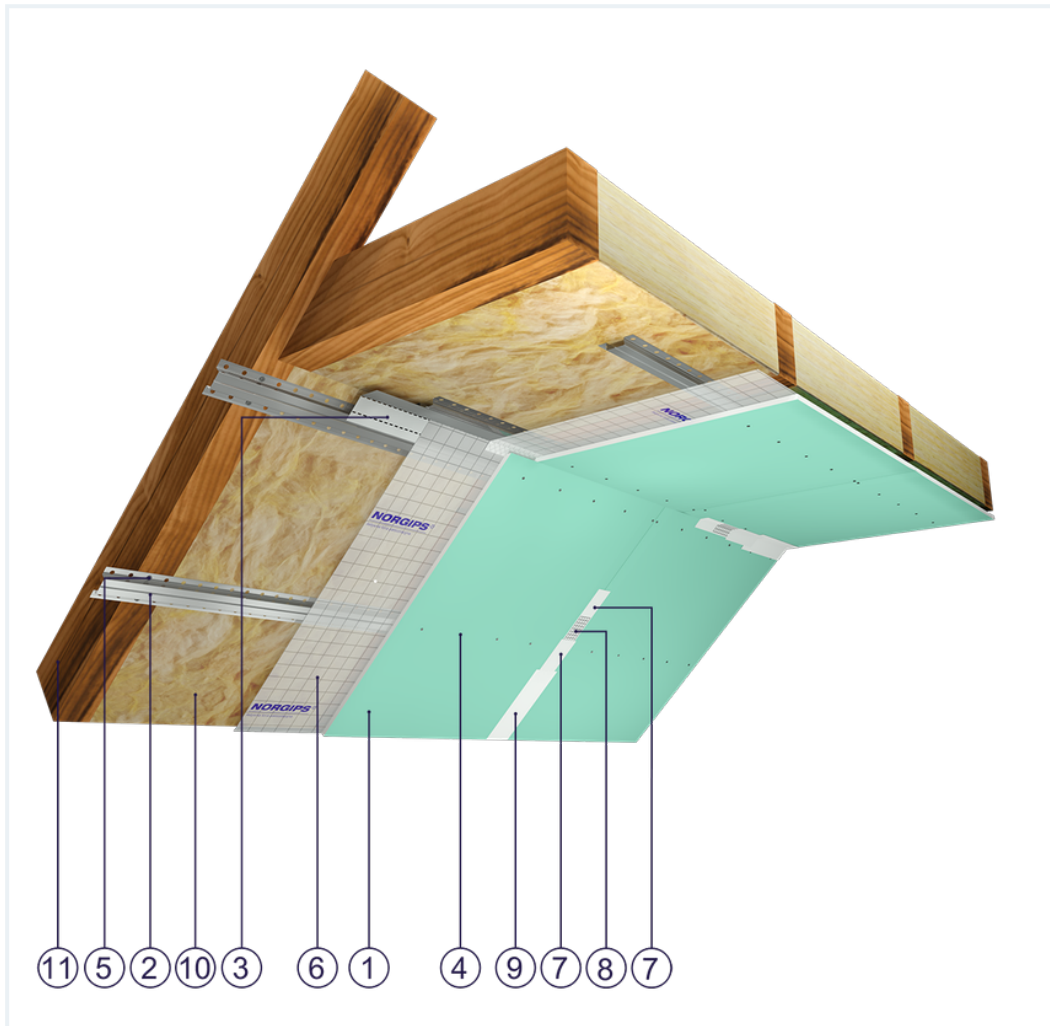

Attic lining elements

1. Norgips S GKBI type H2 gypsum plasterboard , thickness: 12.5 mm
2. Norgips top hat profiles, max. axial spacing every 40 cm
3. Norgips FLEX universal profile
4. Norgips 3.5 x 25 mm sheet metal screws, max. spacing every 17 cm
5. Norgips 3.5 x 35 mm wood screws
6. Vapour barrier membrane
7. Norgips Start & Finish ready-made joint compound or Norgips Start gypsum joint compound
8. Norgips reinforcing tape
9. Ready-made joint compound Norgips Extra Finish, ready-made joint compound Norgips Start & Finish, gypsum joint compound Norgips Finish
10. Mineral wool
11. Roof rafters

Technical data



Lining weight
10 kg/m² ¹⁾

The above-mentioned parameters apply to a partition made of sheet metal profiles with a thickness of 0.5 mm.

1) The weight specified does not include the insulation material weight.

Standard



SMART

Provides a lightweight stable body with proven performance. The solution guarantees quality at an attractive price.

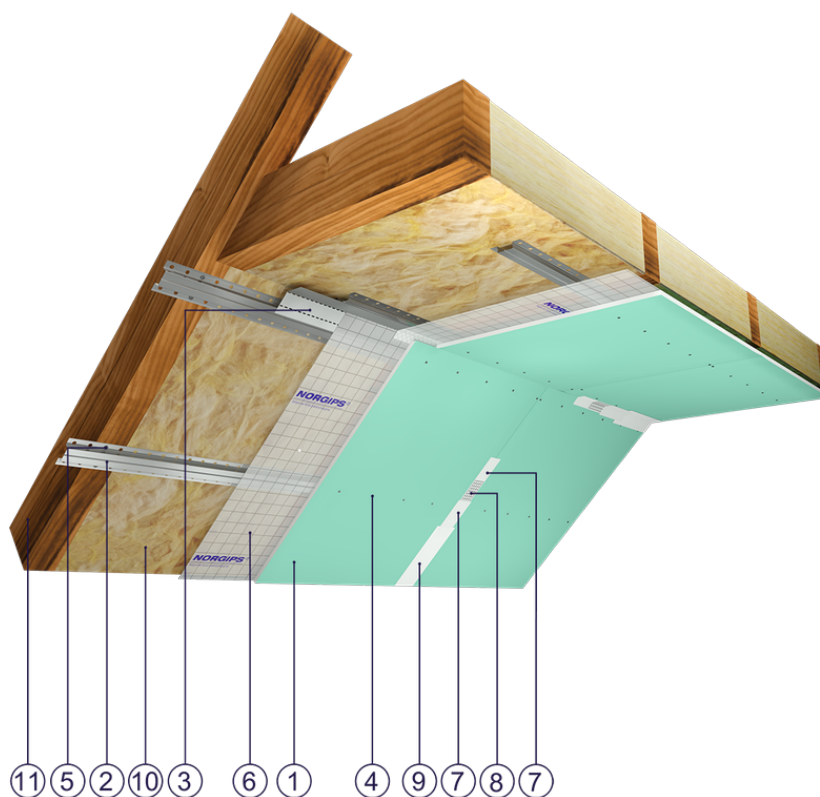


Fig. 1. Attic view

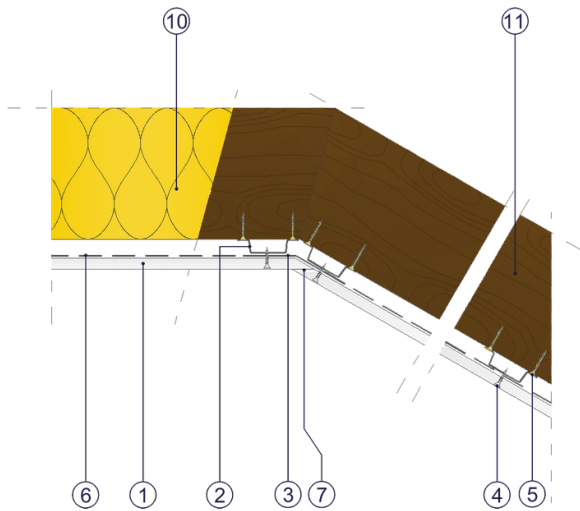


Fig. 2. Attic horizontal section

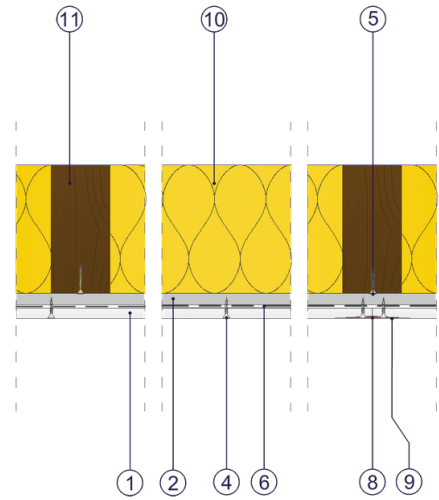


Fig. 3. Attic vertical section