


# LONGITUDINAL COUPLER

**NORGIPS®**

Coupler for CD 60 profiles

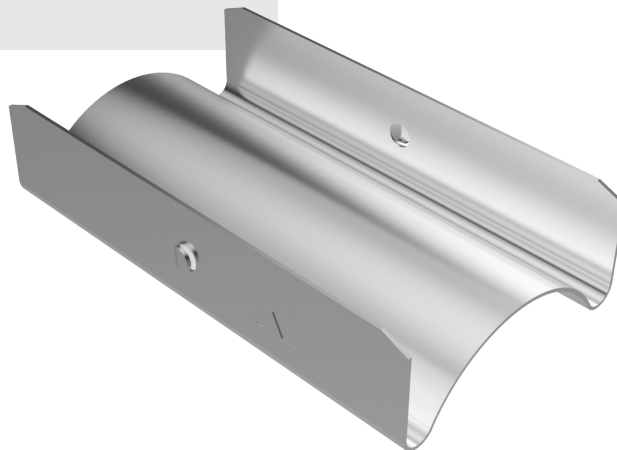

## PRODUCT DESCRIPTION

One-sided longitudinal coupler made of zinc-coated 0.5 mm tick sheet metal. Metal framing component in accordance with PN-EN 13964:2014-05.

## INTENDED USE

Designated for indoor use as an element of a drywall supporting structure. Designated for lengthwise joining of CD 60 profiles when constructing dropped ceilings or attics in locations where longer profiles are required. For making a single joint with profiles, eight Norgips 3.5 x 9.5 mm sheet metal screws with self-tapping bits are to be used.

## TECHNICAL PARAMETERS

Material	DX51D
Sheet metal gauge [mm]	0,5
Type of corrosion protection	Zinc-coated steel
Durability	Class B
Reaction-to-fire performance	A1



Plasterboards + Profiles + Compound + **Accessories** = NORGIPS Solution

## ADVANTAGES

- **Modularity.** Tested as a part of NORGIPS plasterboard lining systems.
- **Safety of use.** Made of 0.5 mm sheet metal.
- **Fire safety.** Tested as a part of fire protection systems with declared fire resistance rating.
- **Marking.** Designations for easy product identification.

## DIMENSIONS AND PACKAGING

Bulk packaging	Number of units in a packaging [pcs]
Cardboard box	100
	50

## NOTES FOR GUIDANCE

The coupler requires indoor storage. Do not expose directly to weathering effects. Use the accessories in accordance with manufacturer's recommendations and design guidelines. Consult any other area of application with the design engineer.

## ADDITIONAL INFORMATION

Standard PN-EN 13964:2014-05 Metal framing components for gypsum board systems. Definitions, requirements and test methods.

Declaration of Performance: available on the website [www.norgips.pl](http://www.norgips.pl)

## NORGIPS sp. z o.o.

ul. Krakowiaków 50,  
02-255 Warsaw, PL  
tel. + 48 605 338 181

[www.norgips.eu](http://www.norgips.eu)

The data presented in this leaflet constitutes solely a product description. It represents a general guidance based on our knowledge and experience, not related to specific applications. Since our products are subjected to constant improvements and development, we reserve the

right to change their parameters without prior notice. The data presented herein cannot form a basis for any claims. If you have any questions, please contact the Norgips Technical Department / Norgips Representative.