

RAWLPLUGS CONSUMER PACKED

NORGIPS®

Rawlplugs for fixing profiles



PRODUCT DESCRIPTION

These quick to install rawlplugs are intended for affixing UW, CW and UD profiles to walls and ceilings made of solid materials such as concrete, ceramic or silicate bricks.

INTENDED USE

Designated for affixing structural elements of dry lining systems to the building structure, in indoor applications. Designated for partition walls, wall claddings, curtain walls, suspended ceilings, ceiling linings, attic linings and other lining systems.

TECHNICAL PARAMETERS


Hole diameter (mm)	6.8
Fastener type	SMG
Screw	Carbon steel S235J RG2
Plug	Polypropylene
Effective anchorage length, mm	30
Unfactored load-bearing capacity [kN]	0.1
National Technical Assessment	ITB-KOT-2017/0116



Plasterboards + Profiles + Compound + **Accessories** = NORGIPS Solution

ADVANTAGES

- **Modularity.** Tested as a part of NORGIPS dry lining systems.
- **Corrosion-protected.** Phosphate-coated sheet metal screws.
- **Fire safety.** Tested as a part of fire protection systems with declared fire resistance rating.
- **Profile marking.** To facilitate the product identification, designations are placed directly on the profiles.

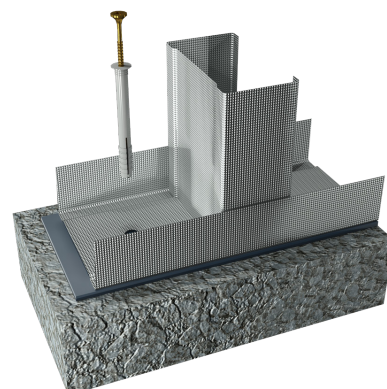


DIMENSIONS AND PACKAGING

Dimensions [mm]	Type of packaging	Qty in a packaging [pcs]	Qty in a bulk packaging [pcs]
6 x 40	Blister pack	20	480
6 x 60	Blister pack	20	480
6 x 80	Blister pack	20	480
8 x 60	Blister pack	20	480
8 x 80	Blister pack	20	480

NOTES FOR GUIDANCE

Store the rawlplugs indoors. Do not expose directly to weathering effects. Use in accordance with manufacturer's recommendations and design guidelines. Consult any other area of application with the design engineer.



ADDITIONAL INFORMATION

National Technical Assessment ITB-KOT-2017/0116

Declaration of Performance: available on the website www.norgips.pl

NORGIPS sp. z o.o.

ul. Krakowiaków 50,
02-255 Warsaw, PL
tel. + 48 605 338 181

www.norgips.eu

The data presented in this leaflet constitutes solely a product description. It represents a general guidance based on our knowledge and experience, not related to specific applications. Since our products are subjected to constant improvements and development, we reserve the

right to change their parameters without prior notice. The data presented herein cannot form a basis for any claims. If you have any questions, please contact the Norgips Technical Department / Norgips Representative.