

SELF-DRILLING SHEET METAL FLEA-SCREWS

Phosphate-coated sheet metal screws with self-drilling bits

NORGIPS®



PRODUCT DESCRIPTION

Mechanical fasteners designed for affixing accessories to steel profiles made of up to 2.0 mm thick sheet metal. Phosphate-coated sheet metal screws with self-drilling bits.

INTENDED USE

Designated for affixing steel components, e.g. accessories, to the structure of dry lining systems. Designated for suspended ceilings, attic linings, partition walls, wall claddings, curtain walls and other lining systems.

TECHNICAL PARAMETERS


Corrosion resistance	Class 24
Type of corrosion protection	Phosphate coating
Screw type	PSD
Reaction-to-fire performance	A1
Pull-out resistance [N]	≤450
Flexural strength	Met
Harmonised standard	EN 14566+A1:2012



Plasterboards + Profiles + Compound + **Accessories** = NORGIPS Solution

ADVANTAGES

- **Modularity.** Tested as a part of NORGIPS dry lining systems.
- **Corrosion-protected.** Phosphate-coated sheet metal screws.
- **Fire safety.** Tested as a part of fire protection systems with declared fire resistance rating.
- **Profile marking.** To facilitate the product identification, designations are placed directly on the profiles.

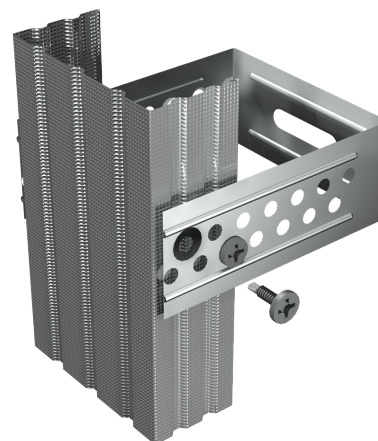

DIMENSIONS AND PACKAGING

Dimensions [mm]	Type of packaging	Qty in a packaging [pcs]	Qty in a bulk packaging [pcs]
3,5 x 9,5	Plastic box	1000	18000
3,5 x 9,5	Cardboard	1000	16000

NOTES FOR GUIDANCE

Store the sheet metal screws indoors. Do not expose directly to weathering effects. Use in accordance with manufacturer's recommendations and design guidelines. For all other uses, consult the design engineer.

ADDITIONAL INFORMATION

Applicable standard: PN-EN 14566+A1:2012 Mechanical fasteners for gypsum plasterboard systems. Definitions, requirements and test methods.

Declaration of Performance: available on the website www.norgips.pl

NORGIPS sp. z o.o.

ul. Krakowiaków 50,
02-255 Warsaw, PL
tel. + 48 605 338 181

www.norgips.eu

The data presented in this leaflet constitutes solely a product description. It represents a general guidance based on our knowledge and experience, not related to specific applications. Since our products are subjected to constant improvements and development, we reserve the

right to change their parameters without prior notice. The data presented herein cannot form a basis for any claims. If you have any questions, please contact the Norgips Technical Department / Norgips Representative.