

SHEET METAL SCREWS ON A STRIP

NORGIPS®

Phosphate-coated sheet metal screws
for affixing plasterboards to steel profiles



PRODUCT DESCRIPTION

Sheet metal screws on a strip for drills with a feeder.
Designed for fixing plasterboard to steel profiles made of
0.5 mm and 0.6 mm thick sheet metal.
Phosphate sheet metal screws.

APPLICATION

For indoor use as fasteners for plasterboard in drywall systems
constructed from steel profiles. Used in partition walls, wall
cladding, curtain walls, suspended ceilings, ceiling cladding, attic
lining and other installations.
The length of the screws used should be at least 10 mm greater
than the thickness of the cladding.

TECHNICAL PARAMETERS

Corrosion resistance	Class 24
Type of corrosion protection	Phosphate coating
Screw type	TMN
Reaction to fire performance	A1
Pull-out resistance [N]	≤450
Flexural strength	MET
Harmonised standard	EN 14566+A1:2012




Plasterboards + Profiles + Compound + **Accessories** = **NORGIPS Solution**

SHEET METAL SCREWS ON A STRIP

NORGIPS®

ADVANTAGES

- **Modularity.** Tested as a part of NORGIPS dry lining systems
- **Speed of installation.** Sheet metal screws on a strip for drills with strip feeders.
- **Corrosion-protected.** Phosphate-coated sheet metal screws.
- **Fire safety.** Tested as a part of fire protection systems with declared fire resistance rating.

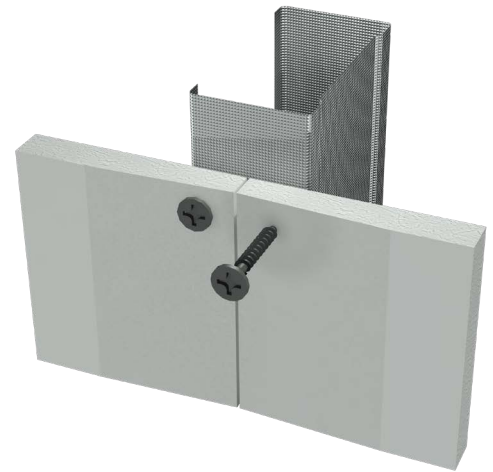


DIMENSIONS AND PACKAGING

Dimensions [mm]	Type of packaging	Qty of screws per strip [pcs]	Qty in a packaging [pcs]	Qty in a bulk packaging [pcs]	GTIN no.
3,5 x 25	Cardboard	50	1000	10 000	5907651697717
3,5 x 35	Cardboard	50	1000	10 000	5907651699889

NOTES FOR GUIDANCE

Store the sheet metal screws indoors. Do not expose directly to weathering effects. Use in accordance with manufacturer's recommendations and design guidelines. For all other uses, consult the design engineer.

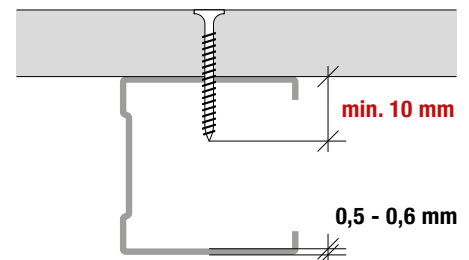

ADDITIONAL INFORMATION

Applicable standard: PN-EN 14566+A1:2012

"Mechanical fasteners for gypsum plasterboard systems. Definitions, requirements and test methods."

Declaration of Performance: available on the website www.norgips.pl



NORGIPS Sp. z o.o.
ul. Krakowiaków 50,
02-255 Warsaw, PL
tel. + 48 605 338 181

www.norgips.eu

The data presented in this leaflet constitutes solely a product description. It represents a general guidance based on our knowledge and experience, not related to specific applications. Since our products are subjected to constant improvements and development, we reserve the right to change their parameters without prior notice. The data presented herein cannot form a basis for any claims. If you have any questions, please contact the Norgips Technical Department / Norgips Representative.